NOTES:

1. PATTERN: SOLID HORIZONTAL LINE 0.125MM WIDTH WITH VERTICAL TICKS ON 5MM SPACING CENTERED ON TOP SURFACE OF BLANK, RIGHT READING LOOKING AT

2. TOLERANCES:

LINE WIDTH: 0.125MM ±0.005MM

POSITIONAL ACCURACY: ±0.003MM UP TO 300MM

±0.005MM UP TO 640MM ±0.007MM UP TO 1000MM

3. COATING: REFLECTIVE CHROMIUM FIRST SURFACE. OPTICAL DENSITY > 3.0.


COATING DESIGNED TO PROVIDE REFLECTION 50% ±5% @ 550 NM

4. MATERIAL:

SODA LIME GLASS: 6.35MM NOMINAL THICKNESS, PHOTO QUALITY SELECT SODA LIME FLOAT GLASS.

LOW CTE GLASS: 4.8MM NOMINAL THICKNESS. CTE 0.02*10-6 K-1

- 5. FLATNESS: TOP SURFACE OF SODA LIME GLASS TO BE ± 0.050 MM
- 6. EDGES: BREAK SHARP EDGES. NO VISIBLE EDGE CHIPS > 0.25 MM DIAMETER
- 7. SURFACE QUALITY: SCRATCH:DIG OF 40:20 OVER PATTERN AREA
- 8. GLASS SIZE: BLANK IS 50.8MM WIDE ±1.5MM. GLASS EDGES ARE SAFETY BEVELED

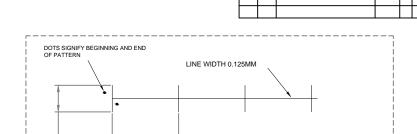


5mm



5/05

UPDATED TOLERANCES

RCC

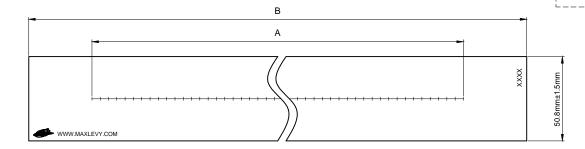

		SODA LIME GLASS		LOW CTE GLASS	
А	В	DASH NO	STOCK NO	DASH NO	STOCK NO
300MM	369MM	-007	EA036	-019	EA048
640MM	699MM	-008	EA037	-020	EA049
1000MM	1080MM	-009	EA038	-021	EA050

	SHEET 3 OF 4						
TOLERANCES (EXCEPT AS NOTED)	MAX LEVY AUTOGRAPH						
DECIMAL .XXX= +/005 .XX= +/015 .X= +/030	SEE NOTES		NONE	DRAWN BY KJV APPROVED BY			
+/030	VISION SYSTEM PRECISION SCALE						
ANGULAR	6/21/04	300	MLA01	08-0XX			