


DATE	SYM	REVISION RECORD	AUTH	DR	CK

NOTES:

1. SUBSTRATE: 1/8" NOMINAL THICK OPAL GLASS
2. SURFACE QUALITY: SCRATCH: DIG 40:20
3. COATING: LOW REFLECTION CHROMIUM FIRST SURFACE. CHROMIUM ADHESION LAYER WITH A TOP LAYER OF CHROMIUM OXIDE, OPTICAL DENSITY > 3.0. COATING PROVIDES REFLECTION < 5% @ 550 NM.
4. EDGES: BREAK ALL SHARP EDGES. NO VISIBLE CHIPS > 0.25 MM DIAMETER.
5. PACKAGING: TARGET IS SIZED TO FIT GARY PLASTIC PART NO. G-1590 (4 1/16" X 4 1/16" X 5/8") WITH TWO FOAM INSERTS.
6. PATTERN:
10 CONCENTRIC CIRCLES CENTERED ON CROSSHAIRS. 0 TO 10MM IN 1 MM INCREMENTS. LINE WIDTH 0.001" FOR ALL LINES.
7. OVERALL ACCURACY $\pm 0.002\text{MM}$

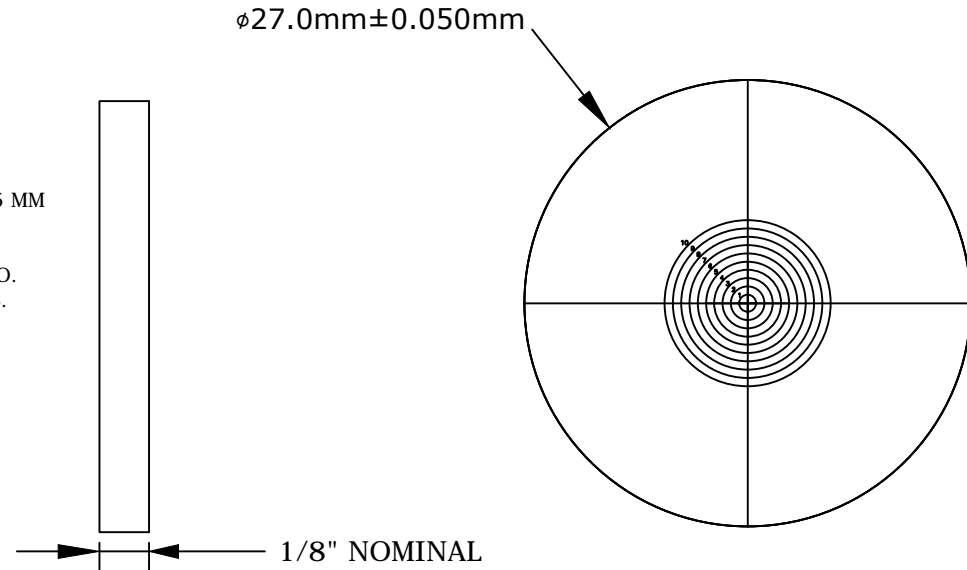

MLO STOCK NUMBER DA070		EDMUNDS PN 58-771	
TOLERANCES (EXCEPT AS NOTED)	MAX LEVY AUTOGRAPH, INC		
DECIMAL . XXX = ±.005 .XX = ±.015 .X = ±.030	MATERIAL OPAL GLASS	SCALE NONE	DRAWN BY DSM
			APPROVED BY SS
FRACTIONAL ±.030	TITLE RETICLE 27MM CONC CIRCLES ON OPAL		
ANGULAR ±.5°	DATE 5/25/06	DRAWING NUMBER 300MLA0143-001	