
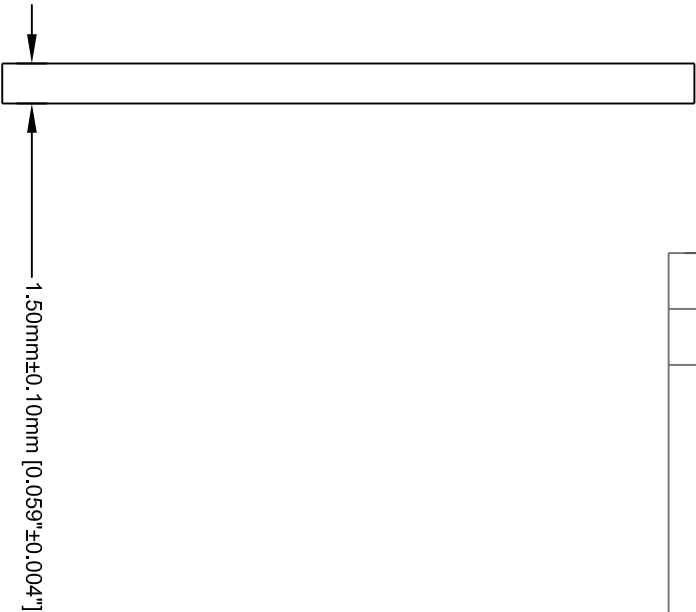


DATE	SYM	REVISION RECORD	AUTH	DR	CK

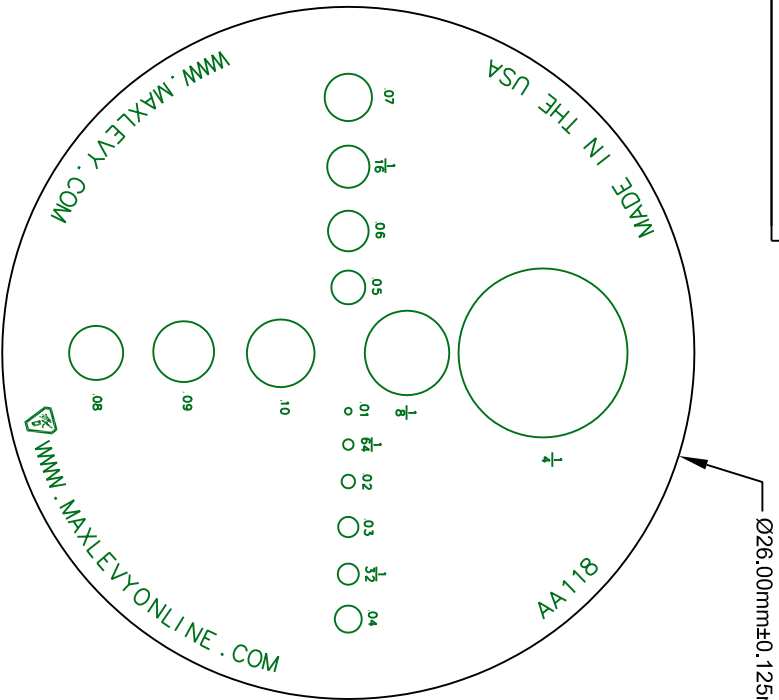

NOTES:

1. BEVEL: REMOVE SHARP EDGES
2. SURFACE FLATNESS: 3-4 WAVES
3. SURFACE QUALITY: SCRATCH-DIG 20:10 OVER ACTIVE AREA
4. PARALLELISM: < 30 ARCSEC
5. PATTERN OVERALL DIMENSIONAL ACCURACY: 0.00004" (0.001MM)
6. PATTERN TO BE CENTERED ON SUBSTRATE ±0.004" (±0.10MM)
7. PATTERN LINEWIDTH IS 0.001" ±0.0001" (0.0254MM ±0.0025MM)
8. PATTERN ORIENTATION: RIGHT READING LOOKING THROUGH. PATTERN ON SAME SURFACE AS BEVEL.
9. COATING: LOW REFLECTION CHROMIUM FIRST SURFACE.  
CHROMIUM ADHESION LAYER WITH A TOP LAYER OF CHROMIUM  
OXIDE. OPTICAL DENSITY > 3.0. COATING DESIGNED TO PROVIDE  
REFLECTION < 5% @ 550 NM
10. PATTERN: 0.01" THROUGH 0.10" IN 0.01" INCREMENTS: 1/64", 1/32", 1/16", 1/8", 1/4"
11. PACKAGING: BAG AND TAG PER 700MLA0060-001
12. CLEAR APERTURE: 20.98 MM

MLO CATALOG NUMBER: AA118		EDMUND P/N: 64853	
TOLERANCES (EXCEPT AS NOTED)		MAX LEVY AUTOGRAPH	
DECIMAL .XXX= +/- .005 .XX= +/- .015 .X= +/- .030	MATERIAL SODA LIME GLASS	SCALE NONE	DRAWN BY MRV
FRACTIONAL	INCH HOLE GAUGE .01" TO .250" DIAMETERS		
ANGULAR	DATE 06-22-09	DRAWING NUMBER 3000MLA0069A-031	
+/-0.5Deg.			