


1. SUBSTRATE: 1.5MM NOMINAL THICK, PHOTO QUALITY SELECT SODA LIME FLOAT GLASS.
INDEX OF REFRACTION 1.521/1.523 (589.3 NM SODIUM D LINE)
2. HOLDER: 1/8" BLACK ANODIZED ALUMINUM.
3. SUBSRATE FLATNESS: 3-4 WAVES / INCH.
4. SURFACE QUALITY: SCRATCH:DIG 20:10 ACTIVE AREA INSIDE DELIMETER CIRCLES, 80:40 ELSEWHERE.
5. COATING: CHROMIUM FIRST SURFACE. OPTICAL DENSITY ≥ 3.0 .
6. EDGES: BREAK ALL SHARP EDGES. NO VISIBLE EDGE CHIPS > 0.25 MM DIAMETER
7. PATTERN TO BE CLEAR FEATURES ON AN OPAQUE BACKGROUND.
8. LINE WIDTH AND DOT DIAMETER TOLERANCE: ± 0.00025 MM.
FEATURE SIZE IS DETERMINED BY MEASURING THE TRANSMISSION OF THE 50 LPMM RULING AND COMPUTING THE LINE AND SPACE RATIO FOR THAT TRANSMISSION.
THE MEASURED TRANSMISSION VALUE AND FEATURE SIZE WILL BE INCLUDED ON THE C OF A.
9. 60 MM SCALE LENGTH TOLERANCE: ± 0.004 MM
10. CERTIFICATION: NIST TRACEABLE CERTIFICATE OF ACCURACY IN COMPLIANCE WITH ISO 117025 WITH PART NUMBER AND SERIAL NUMBER INCLUDED.
11. ASSEMBLE WITH BLACK ENTHONE EPOXY, CURED WITH 20/A CATALYST AT ROOM TEMPERATURE.
12. FEATURES ARE IN COMPLIANCE WITH BOTH ISO 10110-7 AND ISO 14997.
13. LASER ENGRAVE AND ASSEMBLE PER 110MLA0092-001.

DATE	SYM	REVISION/RECORD	AUTH	DR	CK
7/12/06	A	SHRANK INSIDE WINDOW	DSR		
4/4/16	B	SEE ECO 56		DB	

Grade Number	Diameter of Circle (microns)	Dimension of Scratch (microns)
0.004	4.5	1 x 16
0.006	7	1.6 x 25
0.010	11	2.5 x 40
0.016	18	4 x 63
0.025	28	6.3 x 100
0.040	45	10 x 160

50 LPMM LINE WIDTHS VS TRANSMISSION		
LINE	SPACE	%T
0.0095	0.0105	52.5%
0.0096	0.0104	52.0%
0.0097	0.0103	51.5%
0.0098	0.0102	51.0%
0.0099	0.0101	50.5%
0.0100	0.0100	0.50%
0.0101	0.0099	49.5%
0.0102	0.0098	49.0%
0.0103	0.0097	48.5%
0.0104	0.0096	48.0%
0.0105	0.0095	47.5%

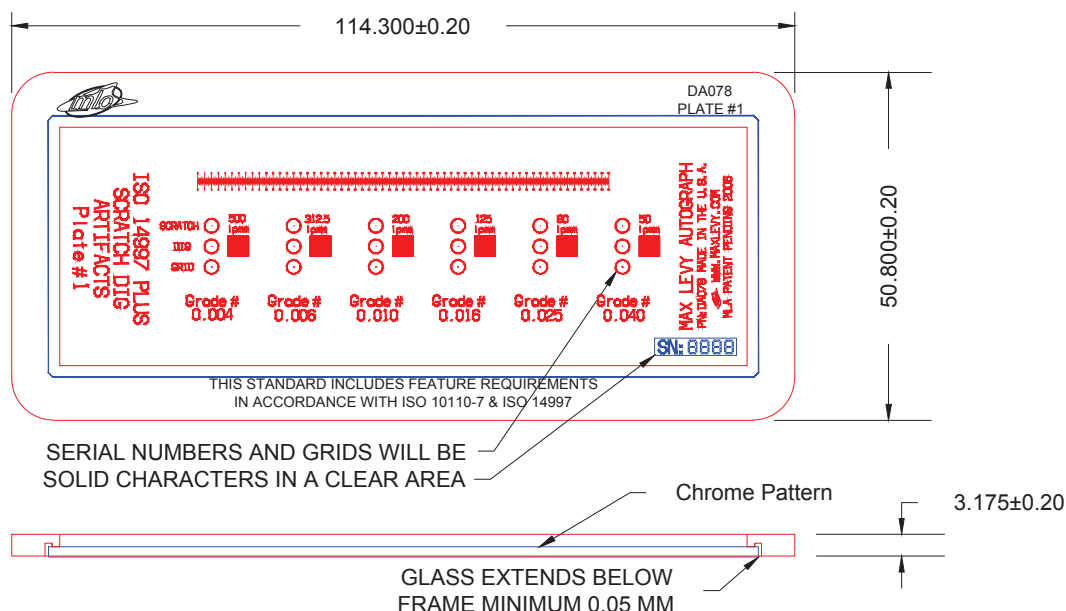


1	TARGET CD
1	PACKATEERS DIE-CUT FOAM LINED CASE
1	GLASS: 300MLA0146-001 1st SURFACE SCRATCH DIG, PLATE #1
1	FRAME: 200MLA0307 SCRATCH DIG HOLDER
QTY	DESCRIPTION
JOB #	RD2071
MM TOLERANCES EXCEPT AS NOTED	MAX LEVY AUTOGRAPH
DECIMAL XXX+/- .1 XXX+/- .2 XX+/- .5	P/N: DA078 PLATE #1
FRACTIONAL +/- .030 ANGULAR +/- 0.5Deg	SCALE DRAWN BY SS APPROVED BY D.ROLLINS
DATE 8/09/06	TITLE ISO 14997 1st SURFACE NEGATIVE SCRATCH DIG MLA PLATE #1 ASSMBLY
DRAWING NUMBER 110MLA0089-009	SHEET NUMBER 1 OF 2

1. SUBSTRATE: 1.5MM NOMINAL THICK, PHOTO QUALITY SELECT SODA LIME FLOAT GLASS.
INDEX OF REFRACTION 1.521/1.523 (589.3 NM SODIUM D LINE)
2. HOLDER: 1/8" BLACK ANODIZED ALUMINUM.
3. SUBSRATE FLATNESS: 3-4 WAVES / INCH.
4. SURFACE QUALITY: SCRATCH:DIG 20:10 ACTIVE AREA INSIDE DELIMETER CIRCLES, 80:40 ELSEWHERE.
5. COATING: CHROMIUM FIRST SURFACE. OPTICAL DENSITY ≥ 3.0 .
6. EDGES: BREAK ALL SHARP EDGES. NO VISIBLE EDGE CHIPS > 0.25 MM DIAMETER
7. PATTERN TO BE CLEAR FEATURES ON AN OPAQUE BACKGROUND.
8. LINE WIDTH AND DOT DIAMETER TOLERANCE: ± 0.00025 MM.
FEATURE SIZE IS DETERMINED BY MEASURING THE TRANSMISSION OF THE 50 LPMM RULING AND COMPUTING THE LINE AND SPACE RATIO FOR THAT TRANSMISSION.
THE MEASURED TRANSMISSION VALUE AND FEATURE SIZE WILL BE INCLUDED ON THE C OF A.
9. 60 MM SCALE LENGTH TOLERANCE: ± 0.004 MM
10. CERTIFICATION: NIST TRACEABLE CERTIFICATE OF ACCURACY IN COMPLIANCE WITH ISO 117025 WITH PART NUMBER AND SERIAL NUMBER INCLUDED.
11. ASSEMBLE WITH BLACK ENTHONE EPOXY, CURED WITH 20/A CATALYST AT ROOM TEMPERATURE.
12. FEATURES ARE IN COMPLIANCE WITH BOTH ISO 10110-7 AND ISO 14997.
13. LASER ENGRAVE AND ASSEMBLE PER 110MLA0092-002.

DATE	SYM	REVISION/RECORD	AUTH	DR	CK
7/12/06	A	SHRANK INSIDE WINDOW	DSR		
4/4/16	B	SEE ECO 56		DB	

Grade Number	Diameter of Circle (microns)	Dimension of Scratch (microns)
.040	45	10 x 160
.060	70	16 x 225
.100	110	25 x 400
.160	180	40 x 630
.250	280	63 x 1000
.400	450	100 x 1600

50 LPMM LINE WIDTHS VS TRANSMISSION		
LINE	SPACE	%T
0.0095	0.0105	52.5%
0.0096	0.0104	52.0%
0.0097	0.0103	51.5%
0.0098	0.0102	51.0%
0.0099	0.0101	50.5%
0.0100	0.0100	0.50%
0.0101	0.0099	49.5%
0.0102	0.0098	49.0%
0.0103	0.0097	48.5%
0.0104	0.0096	48.0%
0.0105	0.0095	47.5%

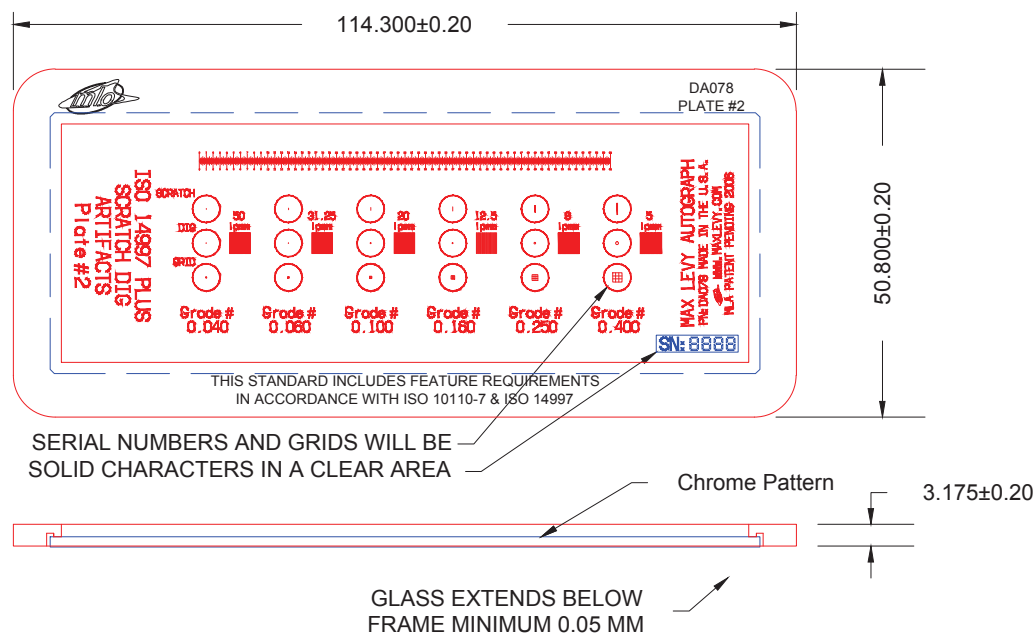

1	TARGET CD
1	PACKATEERS DIE-CUT FOAM LINED CASE
1	GLASS: 300MLA0146-001 1st SURFACE SCRATCH DIG, PLATE #2
1	FRAME: 200MLA0307 SCRATCH DIG HOLDER
QTY	DESCRIPTION
JOB #	RD2071
MM TOLERANCES EXCEPT AS NOTED	MAX LEVY AUTOGRAPH
DECIMAL XXX+/- .1 XXX+/- .2 XX+/- .5	P/N: DA078 PLATE #2
FRACTIONAL +/- .030 ANGULAR +/- 0.5Deg	SCALE DRAWN BY SS APPROVED BY D.ROLLINS
DATE 8/09/06	TITLE ISO 14997 1st SURFACE NEGATIVE SCRATCH DIG MLA PLATE #2 ASSMBLY
DRAWING NUMBER 110MLA0089-010	SHEET NUMBER 2 OF 2