


NOTES:

1. SUBSTRATE: ASSEMBLY 2.5MM THICK (NOM.). PATTERN ON SODA LIME GLASS NOM. THICKNESS 1.5MM BONDED TO WHITE BACKING SUBSTRATE, 1MM THICK CERAMIC OR GLASS
2. FLATNESS: 3-4 WAVES / INCH.
3. EDGES: BREAK SHARP EDGES. NO VISIBLE EDGE CHIPS > 0.25 MM DIAMETER
4. OPTICAL QUALITY: SCRATCH:DIG 20:10 OVER ACTIVE AREA, 60:40 OUTSIDE
5. COATING: LOW REFLECTION CHROMIUM LOOKING THROUGH THE BLANK AT THE SECOND SURFACE. CHROMIUM OXIDE ADHESION LAYER WITH A TOP LAYER OF CHROMIUM. OPTICAL DENSITY > 3.0. COATING DESIGNED TO PROVIDE REFLECTION < 7.5% @ 550 NM.
6. PATTERN:
 LINES AT 1MM INTERVALS, CENTER TO CENTER.
 LINEWIDTH: THE FOUR OUTER EDGE LINES ARE 0.10MM.
 CENTER CROSS LINES ARE 0.125MM
 ALL OTHER LINES ARE 0.075MM.
 LINEWIDTHS EXHIBIT ±0.005MM TOLERANCE
 ACTIVE PATTERN AREA: 20MM X 20MM
 CENTERED ON SUBSTRATE
7. ACTIVE GRID OVERALL ACCURACY, CORNER TO CORNER: ±0.002MM

MAX LEVY AUTOGRAPH, INC. PROPRIETARY		DATE	SYM	REVISION RECORD	AUTH	DR	CK
THIS DRAWING CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS MAX LEVY AUTOGRAPH, INC. PROPERTY. DO NOT DISCLOSE TO NOR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY MAX LEVY AUTOGRAPH, INC.		3/11/08	rev A	Was 1.72, Is 1.00, was 1.36, Is 0.787	SS		
		7/20/09	rev B	Was +/- .001" Is .00004"	SS		

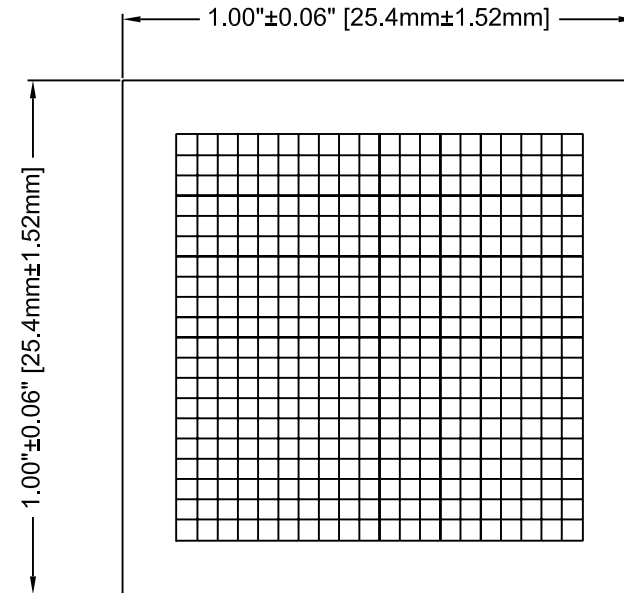

MLO PART NO.: DA039		ONLINE CATALOG RD2055	
TOLERANCES (EXCEPT AS NOTED)		MAX LEVY AUTOGRAPH	
DECIMAL .XXX= +/- .005 .XX= +/- .015 .X= +/- .030	MATERIAL SEE NOTES	SCALE NONE	DRAWN BY TEN
FRACTIONAL +/- .030	TITLE LINE GRID TARGET, ASSEMBLY 1X1"		
ANGULAR +/- 0.5Deg.	DATE 01/22/02	DRAWING NUMBER 300MLA0085-003 rev B	