


MAX LEVY AUTOGRAPH, INC. PROPRIETARY

THIS DRAWING CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS MAX LEVY AUTOGRAPH, INC. PROPERTY. DO NOT DISCLOSE NOR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY MAX LEVY AUTOGRAPH, INC.

DATE	SYM	REVISION RECORD	AUTH	DR	CK

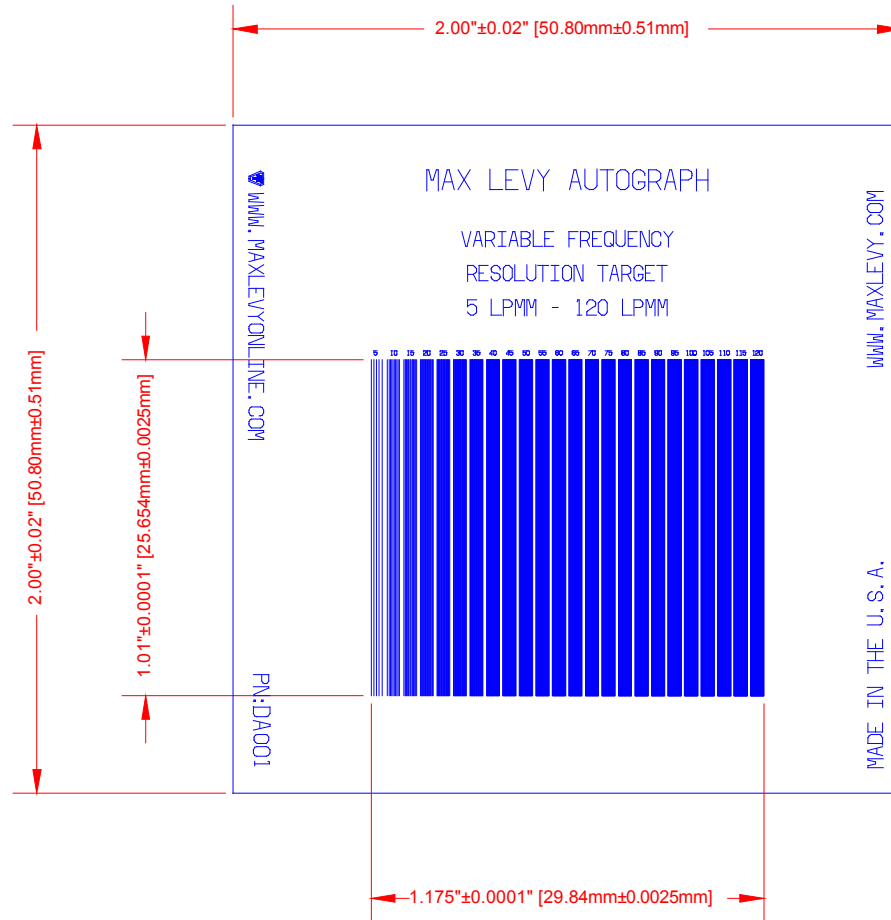

1. SUBSTRATE: 2" X 2" (50.8 X 50.8MM) PHOTO QUALITY SELECT SODA LIME GLASS, INDEX OF REFRACTION 1.512 / 1.523 (0.5893MM, SODIUM D LINE). ALTERNATES B270, SW SUPER WHITE CROWN, C1 CROWN OR EQUIVALENT. NORMAL THICKNESS 1.5MM (1.27/1.78MM)
2. FLATNESS: 0.0025MM / 25.4MM OR BETTER.
3. OPTICAL QUALITY: SUBSTRATE TO BE FREE OF SEEDS, SCRATCHES AND DIGS TO THE EXTENT NECESSARY TO THE REPRODUCTION OF THE TARGET PATTERN. SCRATCHES AND DIGS IN EXCESS OF 20/10 SCRATCH / DIG ARE NOT ACCEPTABLE.
4. COATING: CHROMIUM REFLECTIVITY 50 %  $\pm$  5%. OPTICAL DENSITY >3.0. NO PINHOLES IN THE COATING ARE ACCEPTABLE LARGER THAN 0.025MM. A MAXIMUM OF FIVE (5) PINHOLES ON ANY ONE TARGET MAY BE REPAIRED WITH BLACK EPOXY INK.
5. EDGES: EDGES TO BE SEAMED AND THE CORNERS BROKEN. THERE SHALL BE NO VISIBLE EDGE CHIPS LARGER THAN 0.25MM DIAMETER.
6. TARGET IS SIZED TO FIT GARY PLASTIC CONTAINER PART NO. G-803 (3 1/2" X 2 9/16" X 1/2")
7. TARGET: 1MM WIDE STEP SIZE. 5LP/MM STEP INCREMENTS

FREQUENCY	TOLERANCE	
	ACCURACY	LINEWIDTH
5 L/MM TO 80 L/MM	0.00050 MM	$\pm$ 0.0010 MM
85 L/MM TO 120 L/MM	0.00050 MM	$\pm$ 0.00075 MM

MLO PART NUMBER: DA001		ONLINE CATALOG RD2055	
TOLERANCES (EXCEPT AS NOTED)	MAX LEVY AUTOGRAPH		
DECIMAL .XXX= +/- .005 .XX= +/- .015 .X= +/- .030	MATERIAL SEE NOTES	SCALE NONE	DRAWN BY TEN APPROVED BY
FRACTIONAL +/- .030	TITLE 5 TO 120 LP/MM VARIABLE FREQ. TARGET		
ANGULAR +/- 0.5Deg.	DATE 09/13/01	DRAWING NUMBER 300MLA0059-003	