



DATE	SYM	REVISION RECORD	AUTH	DR	CK
3/29/02	A	CHANGED DIAMETER FROM 20MM TO 27MM	TEN		DS
1/1/05	B	UPDATED SUBSTRATE TYPE	DSM		BM
4/3/07	C	UPDATED SUBSTRATE THICKNESS	DSM		DSM

Ø27.00mm±0.13mm [Ø1.06"±0.005"]

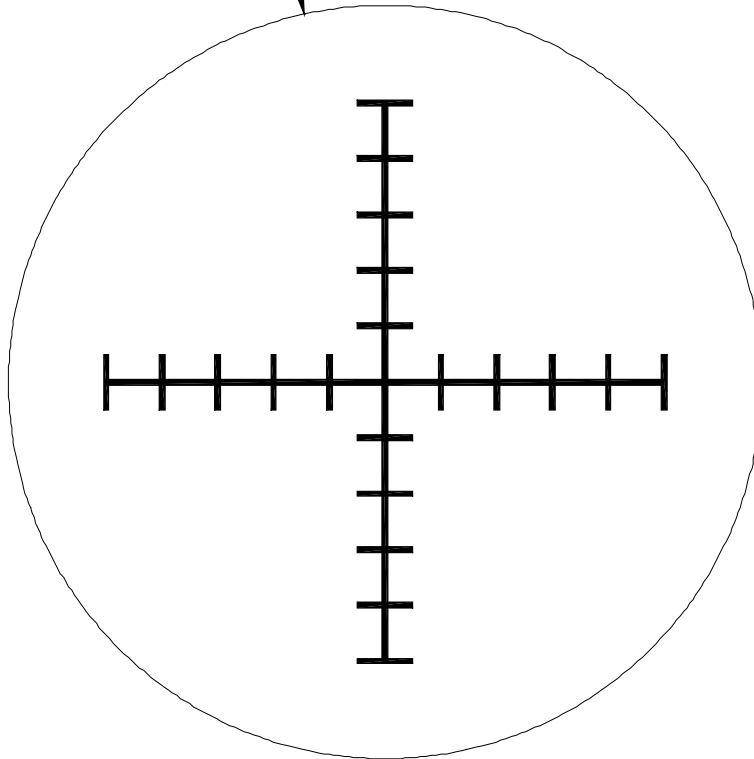

3.2mm Nom [0.125"]

**NOTES:**

1. EDGES: BREAK ALL SHARP EDGES. NO VISIBLE EDGE CHIPS > 0.25 MM DIAMETER
2. SUBSTRATE: SODA LIME GLASS WITH TOP SURFACE FLASHED OPAL AND GROUND 20 µm.
3. PATTERN TO BE CENTERED ON SUBSTRATE ±0.25MM
4. LINEWIDTH: 0.20MM ±0.025MM
5. 20MM CROSSLINE, 2.0MM DIVISIONS. LINE TYPE ETCHED, FILLED WITH BLACK EPOXY.
6. PACKAGING: PACKAGE AND LABEL PER 700MLA0060-001.

MLO PART NUMBER: DA025		SHEET 1 OF 2		ONLINE CATALOG RD2055	
TOLERANCES (DIMENSIONS UNLESS OTHERWISE SPECIFIED)		<b>MAX LEVY AUTOGRAPH</b>			
DECIMAL .XXX= +/- .005 .XX= +/- .015 .X= +/- .030	MATERIAL SEE NOTES	SCALE	DRAWN BY TEN		
FRACTIONAL +/- .030	APPROVED BY DSM				
ANGULAR +/- 0.5Deg.	DATE 01/24/01	TITLE CROSSLINE RETICLE TARGET / OPAL GLASS			
		DRAWING NUMBER 300MLA0079-001			