


| | | | | | | | | | |
|---|--|--|--|------|-----|-----------------|------|----|----|
| MAX LEVY AUTOGRAPH, INC. PROPRIETARY | | | | DATE | SYM | REVISION RECORD | AUTH | DR | CK |
| THIS DRAWING CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION THAT IS MAX LEVY AUTOGRAPH, INC. PROPERTY. DO NOT DISCLOSE NOR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY MAX LEVY AUTOGRAPH, INC. | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

NOTES:

- MATERIAL: PHOTO QUALITY SODA LIME GLASS, NOMINAL THICKNESS OF 0.25".
- PATTERN: ETCHED CHROMIUM DEPOSITED RIGHT READING LOOKING THROUGH THE GLASS.
- BOTH ENGLISH AND METRIC DISPLAYS WITH 180° ROTATION. SCALE SETS: TWO LINEAR SCALES IN A 90° PERPENDICULAR RELATIONSHIP WITH ORIGIN OF EACH TO INTERSECT AT MECHANICAL "0,0". LINE TO LINE ACCURACY ±0.000040. OVERALL ACCURACY ±0.00012". ENGLISH SCALES: HORIZONTAL 6.00" / VERTICAL 3.00". ALL INCREMENTS OF 0.001". METRIC SCALES: HORIZONTAL 150MM / VERTICAL 75MM. INCREMENTS OF 0.025MM. GRID SETS: ENGLISH 1.00" X 1.00", IN INCREMENTS OF 0.25", 0.50", 0.75", 1.00". METRIC 25MM X 25MM, INCREMENTS 5MM, 10MM, 15MM, 20MM, 25MM. CIRCLE SETS: CENTER LINE DIAMETERS FOR ENGLISH INCREMENTS 0.100", 0.250", 0.750", 1.00" METRIC IN INCREMENTS OF 1.0MM, 5.0MM, 12.5MM, 25.0MM. SQUARE SETS: ENGLISH IN INCREMENTS OF 0.100". METRIC IN 1.0MM. ANGLE CHART / PROTRACTOR: 360° RADIAL DISPLAY WITH SIX ANGLES EACH QUADRANT IN 15° INCREMENTS.
- PATTERN LINEWIDTH: 0.0002" ±0.0001" (0.005MM ±0.0025MM)
- PACKAGING: FOAM LINED, PLASTIC CONDUCTIVE CASE.

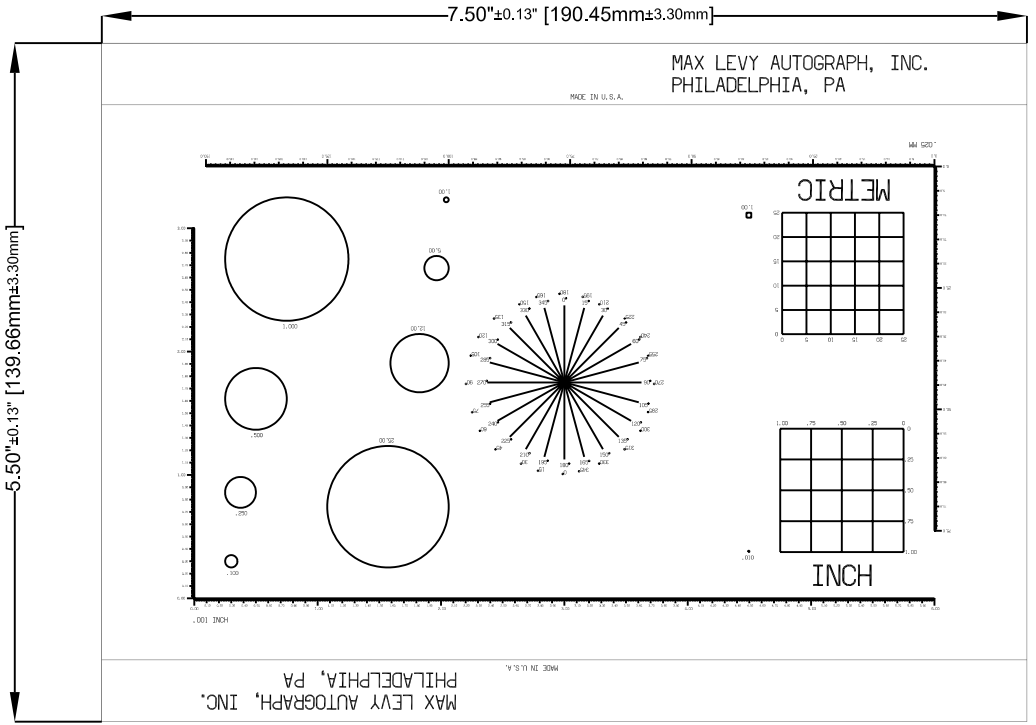

| | | | |
|---|-----------------------------|---|--------------|
| MLO PART NUMBER: HA007 | | ONLINE CATALOG RD2055 | |
| MAX LEVY AUTOGRAPH | | | |
| TOLERANCES (EXCEPT AS NOTED) | MATERIAL | SCALE | DRAWN BY TEN |
| DECIMAL .XXX= +/-,005 .XX= +/-,015 .X= +/-,030 | SEE NOTES | | APPROVED BY |
| FRACTIONAL +/-,030 | CALIBRATION ARTIFACT | | |
| ANGULAR +/-0,5Deg. | DATE 01/23/01 | DRAWING NUMBER 300MLA0049-001 | |