



MAX LEVY AUTOGRAPH, INC. PROPRIETARY
THIS DRAWING CONTAINS CONFIDENTIAL PROPRIETARY
INFORMATION THAT IS MAX LEVY AUTOGRAPH, INC. PROPERTY.
DO NOT DISCLOSE NOR DUPLICATE FOR OTHERS EXCEPT AS
AUTHORIZED BY MAX LEVY AUTOGRAPH, INC.

| DATE | SYM | REVISION RECORD | AUTH | DR | CK |
|------|-----|-----------------|------|----|----|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

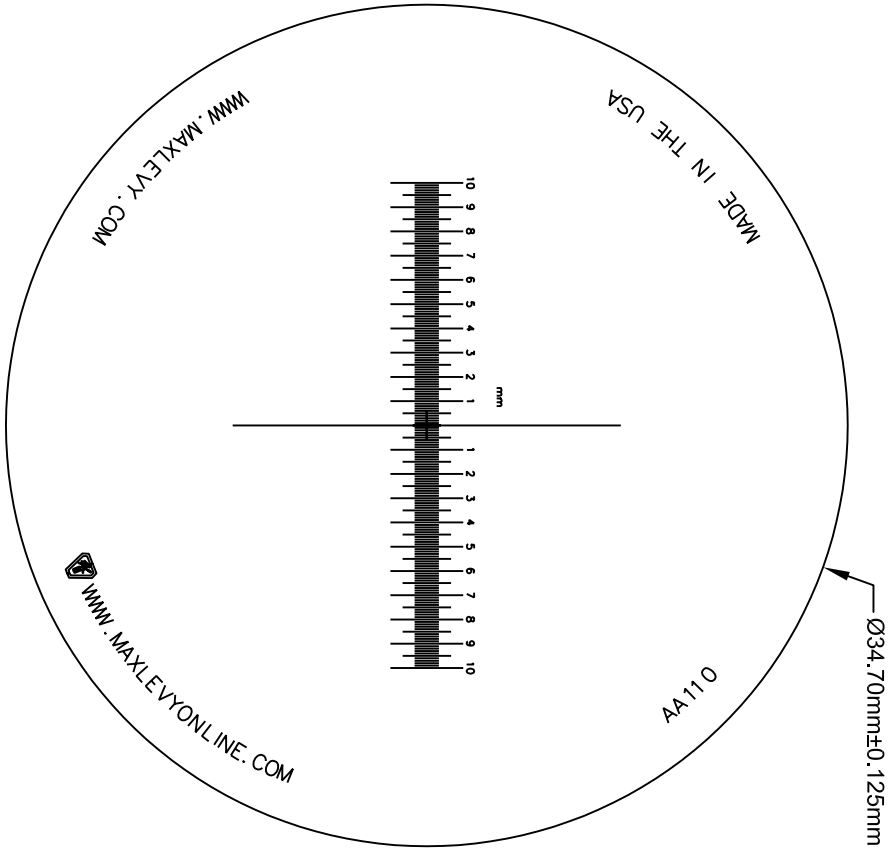

Ø34.70mm±0.125mm [Ø1.366"±0.005"]



NOTES:

1. BEVEL: REMOVE SHARP EDGES.
2. SURFACE FLATNESS: .34 WAVES
3. SURFACE QUALITY: SCRATCH-DIG 20:10 OVER ACTIVE AREA
4. PARALLELISM: < 30 ARCSEC
5. PATTERN OVERALL DIMENSIONAL ACCURACY: 0.00004" (0.001MM)
6. PATTERN TO BE CENTERED ON SUBSTRATE ±0.004" (±0.10MM)
7. PATTERN LINEWIDTH IS 0.001" ±0.0001" (0.0254MM ±0.0025MM)
8. PATTERN ORIENTATION: RIGHT READING LOOKING THROUGH. PATTERN ON SAME SURFACE AS BEVEL.
9. COATING: LOW REFLECTION CHROMIUM FIRST SURFACE.
CHROMIUM ADHESION LAYER WITH A TOP LAYER OF CHROMIUM
OXIDE. OPTICAL DENSITY > 3.0. COATING DESIGNED TO PROVIDE
REFLECTION < 5% @ 550 NM
10. PATTERN: CROSSHAIR RULE 20MM IN 0.1MM INCREMENTS, -10MM TO +10MM
11. PACKAGING: BAG AND TAG PER 700MLA0060-001
12. CLEAR APERTURE: 20.81 MM

| | | | |
|--|--|-----------------------------------|--------------------------------|
| MLO CATALOG NUMBER: AA110 | | EDMUND P/N: 64845 | |
| TOLERANCES (EXCEPT AS NOTED) | | MAX LEVY AUTOGRAPH | |
| DECIMAL .XXX= +/- .005 .XX= +/- .015 .X= +/- .030 | MATERIAL SODA LIME GLASS | SCALE NONE | DRAWN BY MRV APPROVED BY |
| FRACTIONAL | TITLE METRIC RULE, CENTERED WITH CROSSHAIR -10MM TO 10MM | | |
| ANGULAR | DATE 06-22-09 | DRAWING NUMBER 300MLA0070A-029 | |
| +/-0.5Deg. | | | |